

PIPELINE FLOWMETER (Mount in any position)

The main frame of the flow meter of this type is made of engineering plastics of high strength (PC Polycarbonate or polysulfone), which is breaking-proof and corrosion-proof, and can be mounted in any position. It is capable of bearing high pressure, easy to read (the reading is red), and equipped with indicating device showing the upper and lower limit of the flow, so as to test whether it is beyond the safe limit, the max. working pressure is 1.0MPa.


Working Pressure: $\leq 1.0\text{MPa}$
 Temperature Limit: PC 0~80 °C
 PSU 0~120 °C

Accuracy: $\pm 6\%$



Model	Measure Range				Thread
	Water		Air		
	GPM	LPM	GPM	LPM	
Z-6011	0.5-5	2-20	80-320	300-1200	1/2" FNPT or 3/4" MNPT
Z-6012	1-7	4-28	50-450	600-1800	
Z-6013	1-10	4-35	250-700	900-2700	3/4" FNPT or 1" MNPT
Z-6014	1-16	5-60	300-1200	120-4250	
Z-6015	3-18	15-65	450-1250	180-4800	3/4" FNPT or 1" MNPT
Z-6016	4-28	20-100	550-1750	2100-6500	

Model	Measure Range				Thread
	Water		Air		
	GPM	LPM	GPM	LPS	
Z-6501	2-25	10-95	250-1500	15-95	1 1/2" Female or 2" Female
Z-6502	5-50	20-190	350-2200	20-140	
Z-6503	7-75	30-280	450-4500	25-275	2" Female
Z-6504	10-100	40-380	700-6000	45-370	

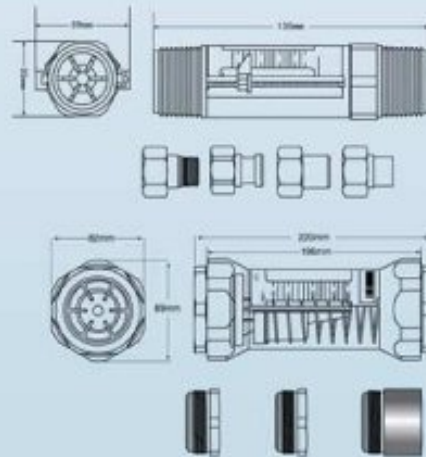

Please choose PC, Polysulfone body material when place order.
 Attention: Hi, Low alarm are optional

Fiammengo srl.

Blanco Encalada 1190 - (B1768BIP) - Villa Madero,
 Prov. de Buenos Aires, Argentina.
 Telefax: (+54 11) 4454 8343.
 E-mail: ventas@fiammengo.com.ar